


Quick Guide - Stiffy 400 - Internal Dimensions

PLEASE NOTE:

Only options available for each specific Stiffy item will be available from the drop down options.

EXAMPLE

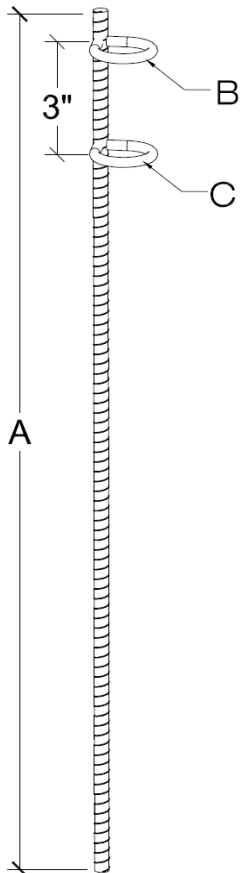

Stiffy I.D.		B	
		For reference only	
		GRC/PVC/ENT	PVC Coated Rigid
*01	7/8"	1/2"(.84 OD)	
*02	1-1/8"	3/4"(1.05" OD)	
*03	1-3/8"	1"(1.32" OD)	3/4" (1.13" OD)
*04	1-5/8"	1-1/4"(1.66" OD)	1" (1.4" OD)
*05	1-7/8"	1-1/2"(1.9" OD)	1-1/4" (1.74" OD)
*06	2-1/8"		1-1/2" (1.98" OD)
*07	2-3/8"	2"(2.38" OD)	
*08	2-7/8"	2-1/2"(2.88" OD)	2" (2.46" OD)
*09	3-1/2"	3"(3.5" OD)	2-1/2" (2.96" OD)
*10	4"	3-1/2"(4" OD)	3" (3.58" OD)
*11	4-1/2"	4"(4.5" OD)	3-1/2" (4.08" OD)
*12	Other-Specify Size		
*Dimensions shown are for conduit OD only. Be sure to oversize the openings to account for couplings.			