


# Fig. 110

## Stiffy Threaded Insulated Pipe Stacker



- Zinc plated rod for corrosion resistance
- Supports Line Sets and Insulated Refrigerant Piping
- 3/8" Threaded Rod can be cut to length in the field.
- 2" wide Plenum Rated plastic bearing surface reduces the pressure on the insulation.
- Max load: 70# per support
- Engineered submittal documents stamped by an engineer.
- Refer to project building code to determine max weight/LF without seismic restraints

**\*\*\* Patent Design**

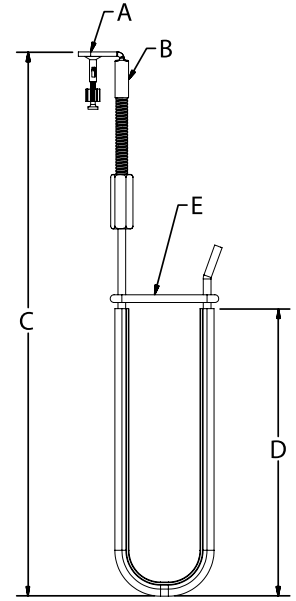

Contractor:		Ship to Address:	
PO#		Order Date:	
<b>**All Orders are Custom and Therefore Non-cancellable and Non-returnable</b>			

	A	B	C	D	E	Qty
Fig 110						
Fig 110						
Fig 110						

Tip...Take a look at the Fig 195 and Fig 196 to support refrigeration piping on a trapeze.

A		B		C	D	E	
*00	No Fastener	*01	*011	Drop Length (Inches)	Return Length (Inches)	*01	1" Opening
*01	1-1/4" Power Actuated Pin—1" Embedment (B = 011)²					*015	1.5" Opening
*02	1-1/2" Power Actuated Pin—1-1/4" Embed (B = 011)²					*02	2" Opening
*03	1/4" x 3-1/4" Wedge Anchor (2" Embed)	90° Footprint	Hard Concrete Footprint			*025	2.5" Opening
*03.1	3/8" x 3" Wedge Anchor (2" Embed)					*3	3" Opening
*04	1/4" x 1-3/4" Concrete Screw Anchor	*012	*02			*035	3.5" Opening
*04.1	3/8" x 1-3/4" Concrete Screw Anchor					*4	4" Opening
*06	#10 Hex Washer Head Self Driller	Gas Tool Footprint	Sidemount Footprint			*045	4.5" Opening
*07	#10 Hex Washer Head Sharp Point					*05	5" Opening
*08	Timberpin (Wood Applications)	*03	*04			*055	5.5" Opening
*09	Wide Mouth Beam Clamp					*06	6" Opening
*12	Adjustable Hammer-on BC Rotates 360° Specify Flange Thickness)	Threaded End (1/2" of Threads)	Straight Rod			*065	6.5" Opening
*13	1-1/4" PowderPuff Pin—1" Embedment (B = 011)²	*10 Other Please Specify		Footnotes: 1—When Power Actuated Fasteners (A=01, 02 or 13) and (B=01 90° Footprint) are selected, the B=011 Hard Concrete Footprint will be used by default. 2—In order to transition to 3/8" ATR a reducing coupler is used for B=01 and 02 Footprints. Hard Concrete Footprints are available in 3/8".			
*14	Stiffy Wood Pull Down Attachment						
*16	Hammer-on Beam Clamp 1/8" - 3/4" Flange						
*17	Bar Joist Pull Down Clamp 1/16" - 1/4 Flange						
*25	Other—Please Specify						

Additional Fastener Options are Shown on Pages 19-21

**Application Examples**



**Fig. 110**  
**MECHANICAL/PLUMBING APPLICATIONS**



**CONSTRUCTION ENGINEERED ATTACHMENT SOLUTIONS**

It's What We Do!