



- Zinc plated rod for corrosion resistance
- Supports service entrance cable fast and effectively
- SER Stackers can be ordered with threaded rod to enable supports to be cut to length in the field
- 2" wide plenum rated plastic bearing surface reduces the pressure on the cables
- Max load: 70 lbs. per support
- Submittal documents stamped by an engineer
- Refer to project building code to determine max weight/ LF without seismic restraints

**\*\*\* Patent Design**

Tip: Take a look at the Fig 123 to support Service Entrance Cable horizontally.

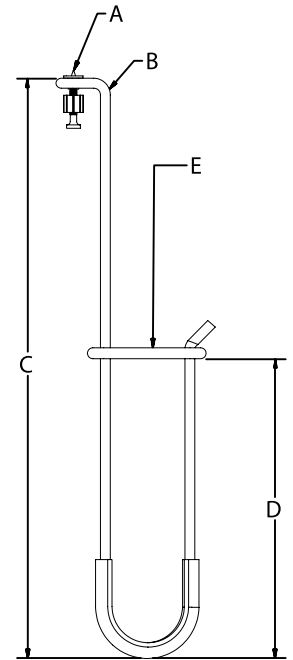

	A	B	C	D	E	F	Qty
Fig 111							



F=02  
Threaded Adjustable  
Version Shown



Scan to  
Learn More

A		B		C	D	E		F	
*00	No Fastener	*01	*011	Drop Length (Inches)	Return Length (Inches)	*01	3/4" Opening	*01	Fixed Length
*01	1-1/4" Power Actuated Pin—1" Embedment (B = 011) 2					*02	1" Opening	*02	Threaded Adjustable Version
*02	1-1/2" Power Actuated Pin—1-1/4" Embed (B = 011) 2					*03	1-1/4" Opening		
*03	1/4" x 3-1/4" Wedge Anchor (2" Embed)					*04	1-1/2" Opening		
*03.1	3/8" x 3" Wedge Anchor (2" Embed)					*05	1-3/4" Opening		
*04	1/4" x 1-7/8" Concrete Screw Anchor					*06	2" Opening		
*04.1	3/8" x 2-1/2" Concrete Screw Anchor								
*06	#10 Hex Washer Head Self Driller	*012	*02						
*07	#10 Hex Washer Head Sharp Point								
*08	Timberpin (Wood Applications)								
*09	Wide Mouth Beam Clamp								
*12	Adjustable Hammer-on BC Rotates 360° Specify Flange Thickness	*03	*04						
*14	Stiffy Wood Pull-Down Attachment								
*16	Hammer-On Beam Clamp 1/8" - 3/4" Flange								
*17	Bar Joist Pull Down-Clamp 1/16" - 1/4 Flange								
*25	Other—Please Specify	*05	*10						
			Other - Please Specify						

**Footnotes:**

1. When Power Actuated Fasteners (A=01, 02 or 13) and (B=01-90° Footprint) are selected the B=011 New Hard Concrete Footprint will be used by default.
2. In order to transition to 3/8" ATR a reducing coupler is used for B=01 and 02 Footprints. New Hard Concrete Footprint B=011, is available in 1/4" and 3/8". BX - Battery Actuated Tool Footprint B=05 available in 1/4".
3. BX Battery-Actuated Tool Footprint B = 05 always provided with No Fastener A = 00.

Additional fastener options are shown on pages 10-11